SIEMENS

Data sheet for SINAMICS Power module PM240-2

Article No.: 6SL3210-1PH22-3UL0

Client order no. : Order no. : Offer no. : Remarks :





Figure simila

Rated data		
Input		
Number of phases	3 AC	
Line voltage	500 690 V ±10 %	
Line frequency	47 63 Hz	
Rated current (LO)	22.00 A	
Rated current (HO)	20.00 A	
Output		
Number of phases	3 AC	
Rated voltage	690V IEC	600V NEC 1)
Rated power (LO)	18.50 kW	20.00 hp
Rated power (HO)	15.00 kW	15.00 hp
Rated current (LO)	23.00 A	
Rated current (HO)	19.00 A	
Max. output current	38.00 A	
Pulse frequency	2 kHz	
Output frequency for vector control	0 200 Hz	
Output frequency for V/f control	0 550 Hz	
Overload canability		

Overload capability

Low Overload (LO)

1.1 x rated output current (i.e. 110 % overload) for 57 s with a cycle time of 300 s 1.5 \times rated output current (i.e. 150 % overload) for 3 s with a cycle time of 300 s

High Overload (HO)

 $1.5\times$ output current rating (i.e., 150 % overload) for 57 s with a cycle time of 300 s 2 \times output current rating (i.e., 200 % overload) for 3 s with a cycle time of 300 s

General tech. specifications		
Power factor λ	0.90	
Offset factor $\cos\phi$	0.99	
Efficiency η	0.98	
Sound pressure level (1m)	72 dB	
Power loss	0.48 kW	
Filter class (integrated)	-	


Ambient conditions		
Internal air cooling		
0.055 m³/s (1.942 ft³/s)		
1,000 m (3,280.84 ft)		
-20 40 °C (-4 104 °F)		
-20 50 °C (-4 122 °F)		
-40 70 °C (-40 158 °F)		
-40 70 °C (-40 158 °F)		
95 % RH, condensation not permitted		
Connections		
screw-type terminal		
10.00 35.00 mm ² (AWG 8 AWG 2)		
Screw-type terminals		
10.00 35.00 mm ² (AWG 8 AWG 2)		
Screw-type terminals		
2.50 16.00 mm ² (AWG 14 AWG 6)		
10 m (32.81 ft)		
Screw-type terminals		
200 m (656.17 ft)		
300 m (984.25 ft)		
nical data		
IP20 / UL open type		
FSD		
17.00 kg (37.48 lb)		
200 mm (7.87 in)		
472 mm (18.58 in)		
237 mm (9.33 in)		
237 mm (9.33 in) dards		



Data sheet for SINAMICS Power module PM240-2

Article No.: 6SL3210-1PH22-3UL0

Converter losses to IEC61800-9-2*		
Efficiency class	IE2	
Comparison with the reference converter (90% / 100%)	39.00 %	

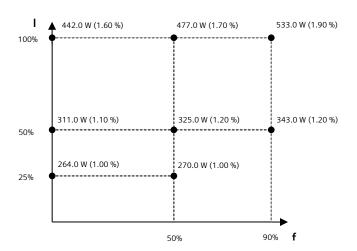

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*calculated values

¹⁾The output current and HP ratings are valid for the voltage range 550V-600V