SIEMENS

Data sheet for SINAMICS Power module PM240P-2

6SL3210-1RH22-7UL0 Article No.:

Client order no. : Order no. : Offer no.: Remarks :





Rated data		
Input		
Number of phases	3 AC	
Line voltage	500 690 V ±10 °	%
Line frequency	47 63 Hz	
Rated current (LO)	25.00 A	
Rated current (HO)	24.00 A	
Output		
Number of phases	3 AC	
Rated voltage	690V IEC	600V NEC 1)
Rated power (LO)	22.00 kW	25.00 hp
Rated power (HO)	18.50 kW	20.00 hp
Rated current (LO)	27.00 A	
Rated current (HO)	23.00 A	
Max. output current	37.00 A	
Pulse frequency	2 kHz	
Output frequency for vector control	0 200 Hz	
Output frequency for V/f control	0 550 Hz	
Overload capability		

Overload	capability
----------	------------

Low Overload (LO)

1.1 x rated output current (i.e. 110 % overload) for 57 s with a cycle time of 300 s $1.35 \times \text{rated}$ output current (i.e. 135 % overload) for 3 s with a cycle time of 300 s

High Overload (HO)

1.5 × output current rating (i.e., 150 % overload) for 60 s with a cycle time of 300 s

General tech. specifications		
Power factor λ	0.90	
Offset factor $\cos\phi$	0.99	
Efficiency η	0.98	
Sound pressure level (1m)	72 dB	
Power loss	0.61 kW	
Filter class (integrated)	-	


Internal air cooling 0.055 m³/s (1.942 ft³/s) 1,000 m (3,280.84 ft)		
1,000 m (3,280.84 ft)		
-20 40 °C (-4 104 °F)		
-20 50 °C (-4 122 °F)		
-40 70 °C (-40 158 °F)		
-40 70 °C (-40 158 °F)		
95 % RH, condensation not permitted		
Connections		
screw-type terminal		
10.00 35.00 mm ² (AWG 8 AWG 2)		
Screw-type terminals		
10.00 35.00 mm ² (AWG 8 AWG 2)		
200 m (656.17 ft)		
300 m (984.25 ft)		
nical data		
IP20 / UL open type		
FSD		
17.40 kg (38.36 lb)		
200 mm (7.87 in)		
472 mm (18.58 in)		
237 mm (9.33 in)		
Standards		
UL, cUL, CE, SEMI F47		
Low-voltage directive 2006/95/EC		



Data sheet for SINAMICS Power module PM240P-2

Article No.: 6SL3210-1RH22-7UL0

Converter losses to IEC61800-9-2*	
Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	39.00 %

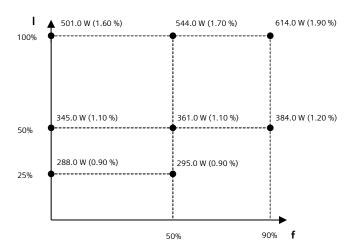

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*calculated values

¹⁾ The output current and HP ratings are valid for the voltage range 550V-600V