

Data sheet for three-phase Squirrel-Cage-Motors ABB

Motor type:	FS: - p - hp -
-------------	----------------

Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project

Remarks
---------

Electrical data
-----------------

[illegible]

Frame Type:	Type of constr.:		Motor Prot.:	NEMA Des.:	S.F.: 1.15
Mtr. WT: lbs	Insulation Class.:	Temp. Rise Cl.: B	Amb. Temp.: + to °C @1000 m	kVA:	IP IP65

Mechanical data
-----------------

Sound level (SPL / SWL) at 60 Hz				dB(A) / dB(A)				Thickener				
Octave Band Center Frequencies Hertz								Safe Stall Time Hot		s		
250	500	1000	2000	4000	8000	Hz		Safe Stall Time Cold		s		
SPL@3								dB(A)		Frame material	cast iron	
Moment of inertia								Lb-ft²		Color, paint shade		
Ext Load Inertia Capability:								Lb ft²		Coating (paint finish)		Standard Alkyed + Epoxy (C2)
Bearings										Ventilation Type		
Bearing DE   NDE										Method of cooling		TEFC
Bearing_Type								Ball Bearing		Direction of rotation		
AFBMA:										Fan Material		Polypropylen ESD
Grease										VFD		CT: VT: 20:1
Capacity								oz		Space heaters		-/-
Grease Type:										Brake:		-/-


Terminal box
--------------

Lead Wire Connection					Terminal box position	
Voltage	L1	L2	L3	Connected together	Material of terminal box	Cast Iron
					Cable entry	-/-

## Notes:


$I_{\text{N}}/I_{\text{N}}$ = locked rotor current / current nominal $M_{\text{N}}/M_{\text{N}}$ = locked rotor torque / torque nominal $M_{\text{B}}/M_{\text{N}}$ = break down torque / nominal torque	3) Value is valid only for DOL operation with motor design IC411 2) at rated power / at full load
--	--

Responsible department IN LVM	Technical reference	Created by SPC	Approved by	<i>Technical data are subject to change! There may be discrepancies</i>
----------------------------------	---------------------	-------------------	-------------	---

	Document type Datasheet	Document status Released		customer	
	Document title 1MB2221-3AC2.-....	Document number			
© ABB 2024		Revision 01	Creation date 2024-05-04 17:39	Language en	Page 1/1

Main terminal diagram


Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Responsible department IN LVM	Technical reference	Created by	Approved by Created automatically	Technical data are subject to change! There may be discrepancies between calculated and rating plate values.		<a href="#">Link documents</a>	
	Document type Wiring diagramm			Document status Released			
	Document title 1MB2221-3AC2.-....			Document number WDS-240504-173913			
Restricted © Innomotics 2024				Revision AA	Creation date 2024-05-04	Language en	Page 1/1

SIEMENS INDUSTRY, INC.

HP 30      VOLTS <600      RPM 1200      TYPE XP100 1D1  
HZ 60      PHASE 3      FRAME 326T      NEMA B

TORQUE & CURRENT VS. SPEED

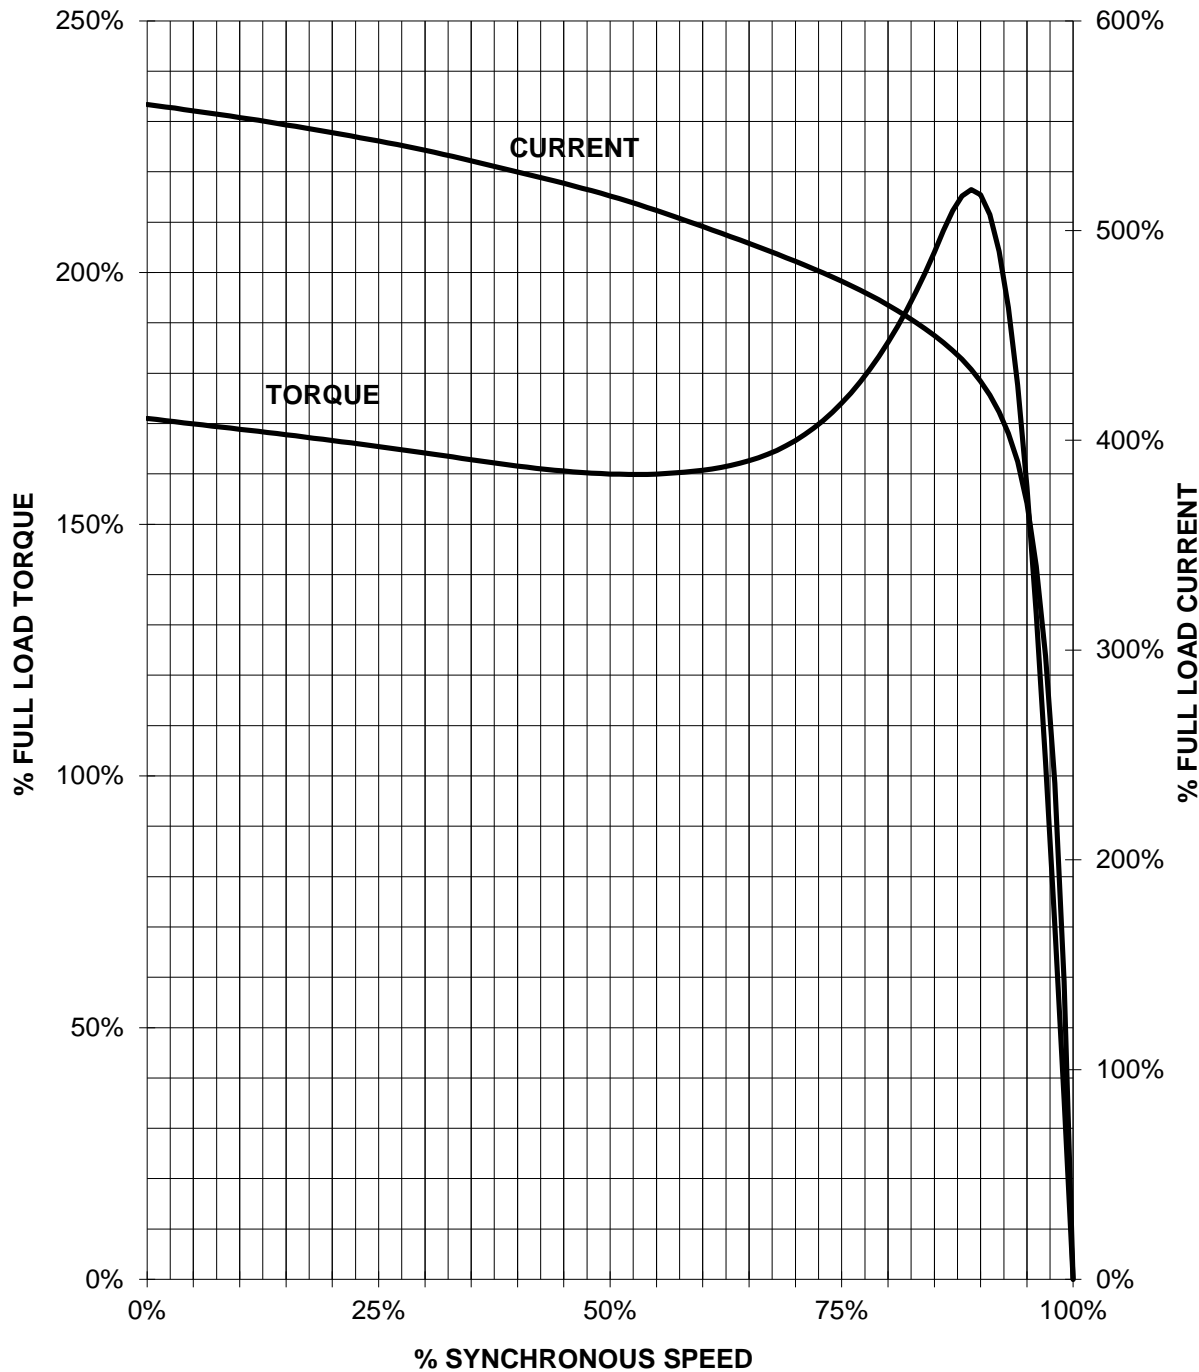

CUSTOMER: \_\_\_\_\_ ORDER#: \_\_\_\_\_

PERFORMANCE BASED ON DESIGN CALCULATIONS. SUBJECT TO CHANGE WITHOUT NOTICE.  
REV. 1