

Article No. : 6SL3210-1PE13-2UL1

Client order no. :  
Order no. :  
Offer no. :  
Remarks :

Item no. :  
Consignment no. :  
Project :

[Figure similar](#)



| Rated data |  |
|------------|--|
|------------|--|

|                    |                     |
|--------------------|---------------------|
| Input              |                     |
| Number of phases   | 3 AC                |
| Line voltage       | 380 ... 480 V ±10 % |
| Line frequency     | 47 ... 63 Hz        |
| Rated current (LO) | 4.10 A              |
| Rated current (HO) | 3.30 A              |

|                                     |                                |
|-------------------------------------|--------------------------------|
| Output                              |                                |
| Number of phases                    | 3 AC                           |
| Rated voltage                       | 400V IEC480V NEC <sup>1)</sup> |
| Rated power (LO)                    | 1.10 kW1.50 hp                 |
| Rated power (HO)                    | 0.75 kW1.00 hp                 |
| Rated current (LO)                  | 3.10 A                         |
| Rated current (HO)                  | 2.20 A                         |
| Max. output current                 | 4.70 A                         |
| Pulse frequency                     | 4 kHz                          |
| Output frequency for vector control | 0 ... 200 Hz                   |
| Output frequency for V/f control    | 0 ... 550 Hz                   |

|                                                                                                                                                                               |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Overload capability                                                                                                                                                           |  |
| Low Overload (LO)                                                                                                                                                             |  |
| 1.1 × rated output current (i.e. 110 % overload) for 57 s with a cycle time of 300 s<br>1.5 × rated output current (i.e. 150 % overload) for 3 s with a cycle time of 300 s   |  |
| High Overload (HO)                                                                                                                                                            |  |
| 1.5 × output current rating (i.e., 150 % overload) for 57 s with a cycle time of 300 s<br>2 × output current rating (i.e., 200 % overload) for 3 s with a cycle time of 300 s |  |

| General tech. specifications |         |
|------------------------------|---------|
| Power factor λ               | 0.85    |
| Offset factor cos φ          | 0.95    |
| Efficiency η                 | 0.96    |
| Sound pressure level (1m)    | 72 dB   |
| Power loss                   | 0.04 kW |
| Filter class (integrated)    | -       |

| Ambient conditions |  |
|--------------------|--|
|--------------------|--|

|                         |                                |
|-------------------------|--------------------------------|
| Cooling                 | Internal air cooling           |
| Cooling air requirement | 0.005 m³/s (0.177 ft³/s)       |
| Installation altitude   | 1,000 m (3,280.84 ft)          |
| Ambient temperature     |                                |
| Operation LO            | -5 ... 40 °C (23 ... 104 °F)   |
| Operation HO            | -5 ... 50 °C (23 ... 122 °F)   |
| Transport               | -25 ... 55 °C (-13 ... 131 °F) |
| Storage                 | -25 ... 55 °C (-13 ... 131 °F) |

|                   |                                     |
|-------------------|-------------------------------------|
| Relative humidity |                                     |
| Max. operation    | 95 % RH, condensation not permitted |

| Connections |
|-------------|
|-------------|

|                         |                                       |
|-------------------------|---------------------------------------|
| Line side               |                                       |
| Version                 | Plug-in screw terminals               |
| Conductor cross-section | 1.00 ... 2.50 mm² (AWG 18 ... AWG 14) |
| Motor end               |                                       |
| Version                 | Plug-in screw terminals               |
| Conductor cross-section | 1.00 ... 2.50 mm² (AWG 18 ... AWG 14) |

|                         |                   |
|-------------------------|-------------------|
| Max. motor cable length |                   |
| Shielded                | 50 m (164.04 ft)  |
| Unshielded              | 100 m (328.08 ft) |

| Mechanical data |
|-----------------|
|-----------------|

|                      |                     |
|----------------------|---------------------|
| Degree of protection | IP20 / UL open type |
| Frame size           | FSA                 |
| Net weight           | 1.40 kg (3.09 lb)   |
| Dimensions           |                     |
| Width                | 73 mm (2.87 in)     |
| Height               | 196 mm (7.72 in)    |
| Depth                | 165 mm (6.50 in)    |


| Standards |
|-----------|
|-----------|

|                           |                                     |
|---------------------------|-------------------------------------|
| Compliance with standards | UL, cUL, CE, C-Tick (RCM), SEMI F47 |
| CE marking                | Low-voltage directive 2006/95/EC    |

Data sheet for SINAMICS Power module PM240-2

Article No. : 6SL3210-1PE13-2UL1

| Converter losses to IEC61800-9-2*                    |         |
|------------------------------------------------------|---------|
| Efficiency class                                     | IE2     |
| Comparison with the reference converter (90% / 100%) | 26.40 % |

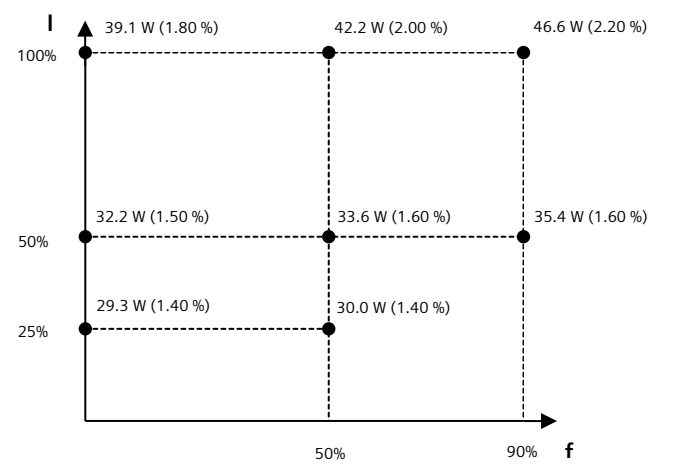

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

\*calculated values

<sup>1)</sup>The output current and HP ratings are valid for the voltage range 440V-480V