

Article No. : 6SL3210-1PH23-5UL0



Figure similar

Client order no. :  
Order no. :  
Offer no. :  
Remarks :

Item no. :  
Consignment no. :  
Project :

### Rated data

Input	
Number of phases	3 AC
Line voltage	500 ... 690 V ±10 %
Line frequency	47 ... 63 Hz
Rated current (LO)	33.00 A
Rated current (HO)	28.00 A

### Output

Number of phases	3 AC	
Rated voltage	690V IEC	600V NEC <sup>1)</sup>
Rated power (LO)	30.00 kW	30.00 hp
Rated power (HO)	22.00 kW	25.00 hp
Rated current (LO)	35.00 A	
Rated current (HO)	27.00 A	
Max. output current	54.00 A	
Pulse frequency	2 kHz	
Output frequency for vector control	0 ... 200 Hz	
Output frequency for V/f control	0 ... 550 Hz	

### Overload capability

Low Overload (LO)
1.1 × rated output current (i.e. 110 % overload) for 57 s with a cycle time of 300 s 1.5 × rated output current (i.e. 150 % overload) for 3 s with a cycle time of 300 s
High Overload (HO)
1.5 × output current rating (i.e., 150 % overload) for 57 s with a cycle time of 300 s 2 × output current rating (i.e., 200 % overload) for 3 s with a cycle time of 300 s

### General tech. specifications

Power factor λ	0.90
Offset factor cos φ	0.99
Efficiency η	0.98
Sound pressure level (1m)	72 dB
Power loss	0.72 kW
Filter class (integrated)	-

### Ambient conditions

Cooling	Internal air cooling
Cooling air requirement	0.055 m³/s (1.942 ft³/s)
Installation altitude	1,000 m (3,280.84 ft)
Ambient temperature	
Operation LO	-20 ... 40 °C (-4 ... 104 °F)
Operation HO	-20 ... 50 °C (-4 ... 122 °F)
Transport	-40 ... 70 °C (-40 ... 158 °F)
Storage	-40 ... 70 °C (-40 ... 158 °F)

### Relative humidity

Max. operation	95 % RH, condensation not permitted
----------------	-------------------------------------

### Connections

#### Line side

Version	screw-type terminal
Conductor cross-section	10.00 ... 35.00 mm² (AWG 8 ... AWG 2)

#### Motor end

Version	Screw-type terminals
Conductor cross-section	10.00 ... 35.00 mm² (AWG 8 ... AWG 2)

#### DC link (for braking resistor)

Version	Screw-type terminals
Conductor cross-section	2.50 ... 16.00 mm² (AWG 14 ... AWG 6)
Cable length	10 m (32.81 ft)
PE connection	Screw-type terminals

#### Max. motor cable length

Shielded	200 m (656.17 ft)
Unshielded	300 m (984.25 ft)

### Mechanical data

Degree of protection	IP20 / UL open type
Frame size	FSD
Net weight	17.00 kg (37.48 lb)
Dimensions	
Width	200 mm (7.87 in)
Height	472 mm (18.58 in)
Depth	237 mm (9.33 in)


### Standards

Compliance with standards	UL, cUL, CE, C-Tick (RCM), SEMI F47
CE marking	Low-voltage directive 2006/95/EC

Data sheet for SINAMICS Power module PM240-2

Article No. : 6SL3210-1PH23-5UL0

Converter losses to IEC61800-9-2*	
Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	39.80 %

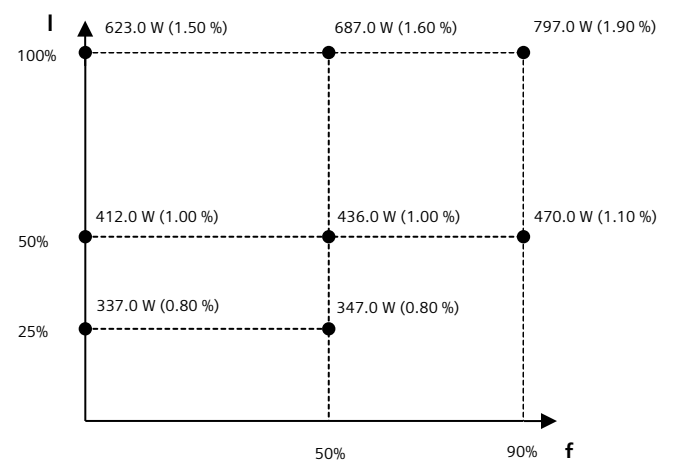

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

\*calculated values

<sup>1)</sup>The output current and HP ratings are valid for the voltage range 550V-600V