SIEMENS

Data sheet for SINAMICS Power module PM240-2 Push through

Article No. :

6SL3211-1PB21-8AL0



igure similar

Client order no. :	
Order no. :	
Offer no. :	
Remarks :	

Rated data			
Input			
Number of phases	1 / 3 AC		
Line voltage	200 240 V ±10	%	
Line frequency	47 63 Hz		
Rated current (LO)	43.00 A / 24.80 A		
Rated current (HO)	37.50 A / 21.70 A		
Output			
Number of phases	3 AC		
Rated voltage	230V IEC	240V NEC 1)	
Rated power (LO)	4.00 kW	5.00 hp	
Rated power (HO)	3.00 kW	4.00 hp	
Rated current (LO)	17.50 A		
Rated current (HO)	13.60 A		
Max. output current	27.20 A		
Pulse frequency	4 kHz		
Output frequency for vector control	0 200 Hz		
Output frequency for V/f control	0 550 Hz		

Overload capability

Low Overload (LO)

1.1 x rated output current (i.e. 110 % overload) for 57 s with a cycle time of 300 s 1.5 \times rated output current (i.e. 150 % overload) for 3 s with a cycle time of 300 s

High Overload (HO)

 $1.5\times$ output current rating (i.e., 150 % overload) for 57 s with a cycle time of 300 s 2 \times output current rating (i.e., 200 % overload) for 3 s with a cycle time of 300 s

General tech. specifications			
Power factor λ	0.85		
Offset factor $\cos \phi$	0.95		
Efficiency η	0.96		
Sound pressure level (1m)	65 dB		
Power loss	0.18 kW		
Filter class (integrated)	Class A		

ltem no. : Consignment no. : Project :


conditions				
Internal air cooling				
0.018 m³/s (0.653 ft³/s)				
1,000 m (3,280.84 ft)				
-5 40 °C (23 104 °F)				
-5 50 °C (23 122 °F)				
-25 55 °C (-13 131 °F)				
-25 55 °C (-13 131 °F)				
95 % RH, condensation not permitted				
Connections				
Plug-in screw terminals				
6.00 16.00 mm² (AWG 10 AWG 6)				
Plug-in screw terminals				
6.00 16.00 mm² (AWG 10 AWG 6)				
50 m (164.04 ft)				
100 m (328.08 ft)				
Mechanical data				
IP20 / UL open type				
n zov oz open type				
FSC				
FSC				
FSC				
FSC 6.30 kg (13.89 lb)				
FSC 6.30 kg (13.89 lb) 154 mm (6.06 in)				
FSC 6.30 kg (13.89 lb) 154 mm (6.06 in) 345 mm (13.58 in)				
FSC 6.30 kg (13.89 lb) 154 mm (6.06 in) 345 mm (13.58 in) 171 mm (6.73 in)				

SIEMENS

Data sheet for SINAMICS Power module PM240-2 Push through

Article No. :

6SL3211-1PB21-8AL0

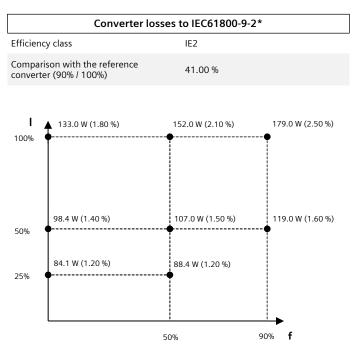

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*calculated values

¹⁾The output current and HP ratings are valid for the voltage range 220V-240V