

Data sheet for SINAMICS Power module PM240-2 Push through

Article No. : 6SL3211-1PE31-1UL0



Figure similar

Client order no. :  
Order no. :  
Offer no. :  
Remarks :

Item no. :  
Consignment no. :  
Project :


Rated data		
Input		
Number of phases	3 AC	
Line voltage	380 ... 480 V ±10 %	
Line frequency	47 ... 63 Hz	
Rated current (LO)	104.00 A	
Rated current (HO)	94.00 A	
Output		
Number of phases	3 AC	
Rated voltage	400V IEC	480V NEC <sup>1)</sup>
Rated power (LO)	55.00 kW	75.00 hp
Rated power (HO)	45.00 kW	60.00 hp
Rated current (LO)	110.00 A	
Rated current (HO)	90.00 A	
Max. output current	180.00 A	
Pulse frequency	4 kHz	
Output frequency for vector control	0 ... 200 Hz	
Output frequency for V/f control	0 ... 550 Hz	
Overload capability		
Low Overload (LO)		
1.1 x rated output current (i.e. 110 % overload) for 57 s with a cycle time of 300 s 1.5 x rated output current (i.e. 150 % overload) for 3 s with a cycle time of 300 s		
High Overload (HO)		
1.5 x output current rating (i.e., 150 % overload) for 57 s with a cycle time of 300 s 2 x output current rating (i.e., 200 % overload) for 3 s with a cycle time of 300 s		
General tech. specifications		
Power factor λ	0.95	
Offset factor cos φ	0.99	
Efficiency η	0.97	
Sound pressure level (1m)	62 dB	
Power loss	1.61 kW	
Filter class (integrated)	-	

Ambient conditions	
Cooling	Internal air cooling
Cooling air requirement	0.083 m³/s (2.931 ft³/s)
Installation altitude	1,000 m (3,280.84 ft)
Ambient temperature	
Operation LO	-20 ... 40 °C (-4 ... 104 °F)
Operation HO	-20 ... 50 °C (-4 ... 122 °F)
Transport	-40 ... 70 °C (-40 ... 158 °F)
Storage	-40 ... 70 °C (-40 ... 158 °F)
Relative humidity	
Max. operation	95 % RH, condensation not permitted
Connections	
Line side	
Version	screw-type terminal
Conductor cross-section	25.00 ... 70.00 mm² (AWG 4 ... AWG -1)
Motor end	
Version	Screw-type terminals
Conductor cross-section	25.00 ... 70.00 mm² (AWG 4 ... AWG -1)
DC link (for braking resistor)	
Version	Screw-type terminals
Conductor cross-section	10.00 ... 35.00 mm² (AWG 8 ... AWG 2)
Cable length	10 m (32.81 ft)
PE connection	Screw-type terminals
Max. motor cable length	
Shielded	200 m (656.17 ft)
Unshielded	300 m (984.25 ft)
Mechanical data	
Degree of protection	IP20 / UL open type
Frame size	FSE
Net weight	30.50 kg (67.24 lb)
Dimensions	
Width	354 mm (13.94 in)
Height	615 mm (24.21 in)
Depth	237 mm (9.33 in)
Standards	
Compliance with standards	UL, cUL, CE, C-Tick (RCM), SEMI F47
CE marking	Low-voltage directive 2006/95/EC

Data sheet for SINAMICS Power module PM240-2 Push through

Article No. : 6SL3211-1PE31-1UL0

Converter losses to IEC61800-9-2*	
Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	47.20 %

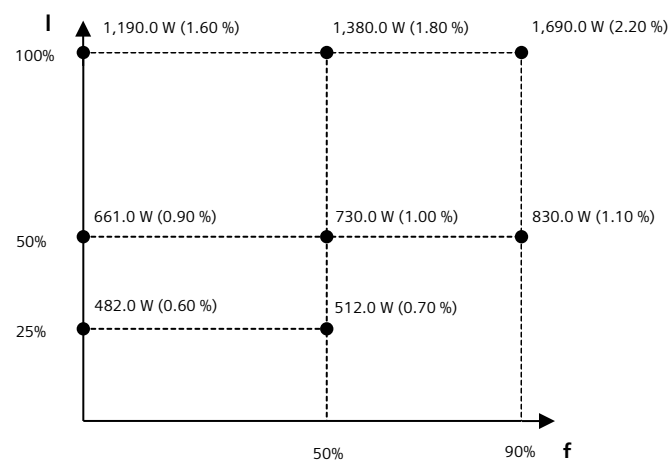

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

\*calculated values

<sup>1)</sup>The output current and HP ratings are valid for the voltage range 440V-480V