

Article No. : 6SL3225-0BE25-5AA1



Figure similar

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Rated data

| Input | |
|--------------------|---------------------|
| Number of phases | 3 AC |
| Line voltage | 380 ... 480 V ±10 % |
| Line frequency | 47 ... 63 Hz |
| Rated current (LO) | 18.00 A |
| Rated current (HO) | 13.20 A |

| Output | | |
|-------------------------------------|--------------|------------------------|
| Number of phases | 3 AC | |
| Rated voltage | 400V IEC | 480V NEC ¹⁾ |
| Rated power (LO) | 7.50 kW | 10.00 hp |
| Rated power (HO) | 5.50 kW | 7.50 hp |
| Rated current (LO) | 18.00 A | |
| Rated current (HO) | 13.20 A | |
| Max. output current | 26.40 A | |
| Pulse frequency | 4 kHz | |
| Output frequency for vector control | 0 ... 200 Hz | |
| Output frequency for V/f control | 0 ... 550 Hz | |

| Overload capability |
|---|
| Low Overload (LO) 1.1 × rated output current (i.e. 110 % overload) for 57 s with a cycle time of 300 s 1.5 × rated output current (i.e. 150 % overload) for 3 s with a cycle time of 300 s |
| High Overload (HO) 1.5 × output current rating (i.e., 150 % overload) for 57 s with a cycle time of 300 s 2 × output current rating (i.e., 200 % overload) for 3 s with a cycle time of 300 s |

| General tech. specifications | |
|------------------------------|---------|
| Power factor λ | 0.90 |
| Offset factor cos φ | 0.95 |
| Efficiency η | 0.95 |
| Sound pressure level (1m) | 60 dB |
| Power loss | 0.26 kW |
| Filter class (integrated) | Class A |

Ambient conditions

| Cooling | Internal air cooling |
|-------------------------|--------------------------------|
| Cooling air requirement | 0.038 m³/s (1.342 ft³/s) |
| Installation altitude | 1,000 m (3,280.84 ft) |
| Ambient temperature | |
| Operation LO | 0 ... 40 °C (32 ... 104 °F) |
| Operation HO | 0 ... 50 °C (32 ... 122 °F) |
| Transport | -25 ... 55 °C (-13 ... 131 °F) |
| Storage | -25 ... 55 °C (-13 ... 131 °F) |

| Relative humidity | |
|-------------------|-------------------------------------|
| Max. operation | 95 % RH, condensation not permitted |

Connections

| Line side | |
|-------------------------|--|
| Version | screw-type terminal |
| Conductor cross-section | 2.50 ... 10.00 mm² (AWG 14 ... AWG 8) |
| Motor end | |
| Version | Screw-type terminals |
| Conductor cross-section | 2.50 ... 10.00 mm² (AWG 14 ... AWG 8) |

| Max. motor cable length | |
|-------------------------|-------------------|
| Shielded | 25 m (82.02 ft) |
| Unshielded | 100 m (328.08 ft) |

Mechanical data

| Degree of protection | IP20 / UL open type |
|----------------------|---------------------|
| Frame size | FSC |
| Net weight | 7.50 kg (16.53 lb) |
| Dimensions | |
| Width | 189 mm (7.44 in) |
| Height | 334 mm (13.15 in) |
| Depth | 185 mm (7.28 in) |


Standards

| | |
|---------------------------|----------------------------------|
| Compliance with standards | UL, cUL, CE, C-Tick (RCM) |
| CE marking | Low-voltage directive 2006/95/EC |

Data sheet for SINAMICS Power module PM250

Article No. : 6SL3225-0BE25-5AA1

| Converter losses to IEC61800-9-2* | |
|--|---------|
| Efficiency class | IE2 |
| Comparison with the reference converter (90% / 100%) | 59.08 % |

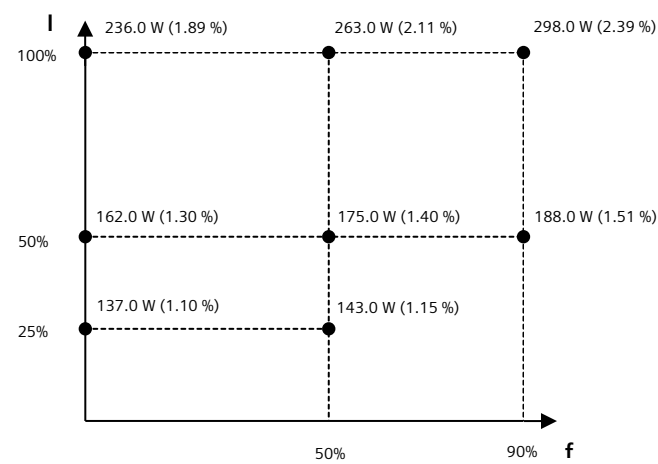

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*calculated values

¹⁾The output current and HP ratings are valid for the voltage range 440V-480V