

Data sheet for SINAMICS G120P Cabinet



MLFB-Ordering data: 6SL3710-1PG37-2AA0 \*\*

Client order no.:  
Order no.:  
Offer no.:  
Remarks:


Item no.:  
Consignment no.:  
Project:

Rated data	
Input	
Supply frequency	47...63 Hz
Supply voltage	690 V ±10%
Rated input current	690.0 A
Max. current	995 A
Pulse number	6
Energy recovery capability	No (2Q)
Output:	
Output voltage	690 V
Rated power (LO) in kW	630 kW
Rated power (HO) in kW	560 kW
Rated output current ***	664.0 A
Rated output current (LO) ***	650 A
Rated output current (HO) ***	532 A
Output current Max	959 A
Pulse frequency (nominal)	2.00 kHz

Basic data:	
Absolute power loss in stand-by	403 W
Sound pressure level L <sub>pA</sub> (1 m)	69 dB
Conductor cross section, max. (IEC)	4 x 240 mm <sup>2</sup>
Degree of protection	IP20
Installation envelope dimensions (H x W x D)	2300 mm x 1200 mm x 600 mm
Weight approx.	716 kg
Frame size	FSJX
Design	A
Color, paint shade	RAL7035
Compliance with standards	CE, RCM, EAC

Environmental conditions	
Installation altitude	1000 m
Coolant	Air
Coolant requirement, air	0.70 m³/s
Ambient temperature	0 °C - +40 °C

Converter losses to IEC61800-9-2\*

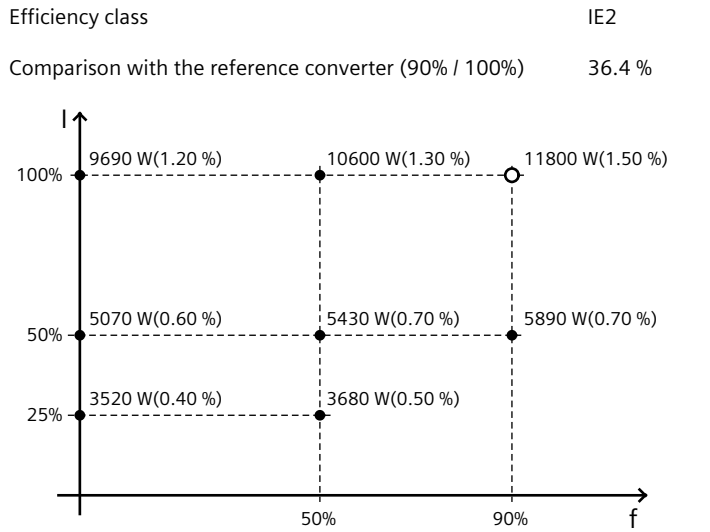

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency(f). The values are valid for the basic version of the converter including line choke without options/components.

Special design